



International Conference on Bioenergy Utilization and Environment Protection

*Dalian, China
24-26 September 2003
Dalian Bangchui Island Hotel*

CONFERENCE PROCEEDINGS



The International Conference on Bioenergy Utilisation and Environment Protection was held in Dalian, P.R. China, from September 24 – 26, 2003. It was organized jointly by the Latin American Thematic Network on Bioenergy (LAMNET), the Center for Energy and Environment Protection (CEEP) of the Chinese Ministry of Agriculture and the China Association of Rural Energy Industry (CAREI).

LAMNET - Latin America Thematic Network on Bioenergy

Coordination: WIP, Germany

Coordinator/ focal contact point:

Dr. Rainer Janssen (rainer.janssen@wip-munich.de)

Updated information on this workshop is available at <http://www.bioenergy-lamnet.org>.

Workshop Organisation Support

Wang Zengyuan, Beijing Nonghua Technical Development Center – Chinese Ministry of Agriculture, P.R. China

Xiao Mingsong, China Association of Rural Energy Industry (CAREI), P.R. China

Sun Hong, China Association of Rural Energy Industry (CAREI), P.R. China

Zhao Dongjian, Dalian Office of China Center of Social Economy Investigation and Research, P.R. China

Ing. Francesco Cariello, ETA-Florence, Italy

Dr. Giuliano Grassi, European Biomass Industry Association – EUBIA

Dr. Peter Grimm, WIP-Munich, Germany

Dr. Peter Helm, WIP-Munich, Germany

Editor of Workshop Proceedings

Dr. Rainer Janssen, WIP, Germany

Dr. Yao Xiangjun, Center for Energy and Environment Protection (CEEP), P.R. China

Prof. Wang Mengjie, China Association of Rural Energy Industry (CAREI), P.R. China

Published by: WIP-Munich
Sylvensteinstr. 2
81369 Munich, Germany
Phone: +49 89 720 127 35
Fax: +49 89 720 127 91
E-mail: wip@wip-munich.de
Web: www.wip-munich.de

SESSION 3: INNOVATIVE BIOENERGY TECHNOLOGIES

International Conference on Bioenergy Utilization and Environment Protection
6th LAMNET Workshop – Dalian, China 2003

Normal Temperature Briquetting Technology for Biomass with Original Moisture Content

Mr. Che Zhanbin
Beijing Huizhongshi Science Co. Ltd.
Tsinghua University, 100084 Beijing, China
Email: chezhanbin@hotmail.com

Abstract

Untreated biomass has low bulk density and high transportation cost. The existing biomass processing systems are normally complicated, expensive and space demanding. The new normal temperature briquetting technique developed for biomass with original moisture contents can simplify treatment process, reduce space required and lower transportation cost.

1 Introduction

A series of biomass briquetting systems have already been widely developed based on lignin plasticitation mechanism. These systems are normally complicated, space demanding and energy consuming. They are also very sensitive to biomass moisture content. The availability of these systems are limited by the radius of biomass transportation and the life of key abrasion-resistant components. Hence, the general cost of biomass utilization is high and the biomass application heavily rely on government subsidies. Biomass can only be market competitive after its running cost is comparable or even lower than that of coal.

2 Existing Biomass Briquetting Technique

2.1 Mechanism

Lignin and cellulose are the two major compounds of biomass. Lignin distributed among cellulose determines the structure strength of biomass. Lignin is a non-crystallized aromatic polymer with no fixed melting point. If heated to 200–300°C, lignin starts to be soft, melted and liquefied. If pressure is applied in this case, lignin will glue cellulose together, which is solidified and briquetted after cooling down.

2.2 Briquetting Process

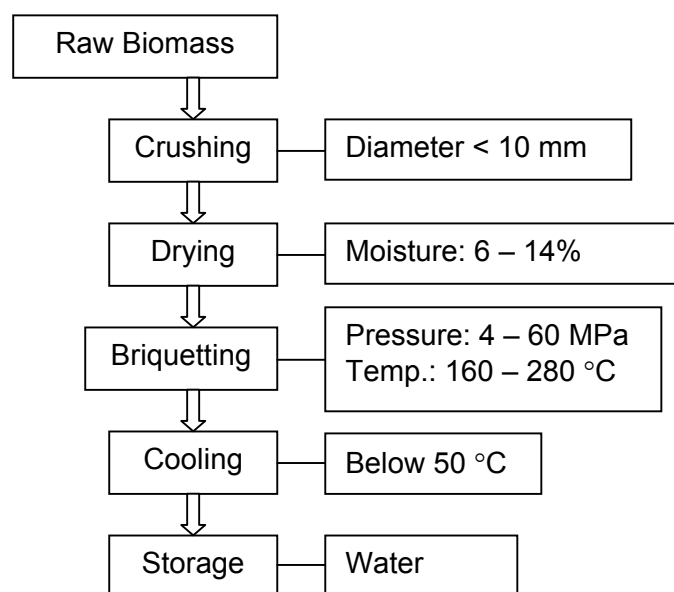


Figure 1. The Existing Biomass Briquetting Technique

2.3 Major Problems

The biomass briquetting systems based on lignin plasticitation mechanism requires high temperature of 160 – 280 °C. They generally have the following problems:

- 2.3.1 The moisture content of the raw material must be controlled within the range of 6 – 14% for a successful briquetting process. However, the moisture contents of original biomass is normally much higher than required. Energy must be applied for the drying and cooling procedures before and after the briquetting process respectively. The low moisture requirement not only increases the cost of biomass processing, but also limits the whole system to specific workshops.
- 2.3.2 The compressing part must work under 160 – 280 °C. The abrasion of the device will be increased and the working lifetime will be reduced.
- 2.3.3 The whole system lost its mobility and is limited within the reasonable biomass transportation radius. It is difficult to scale-up to gain more economic benefits.

3 New Biomass Briquetting Technique

3.1 Mechanism

The characteristics of original biomass depends on the overall performance of its compounds. It has been verified that, although pure lignin does dissolve in water, it has the ability to absorb water. Lignin and water co-exist in original biomass. Biomass has low physical resistance. If a shear force is applied, the cellulose molecules in biomass will be disturbed, shifted and expressed as layers. With relatively small pressure, these layers will be embedded, folded and reformed into a new shape.



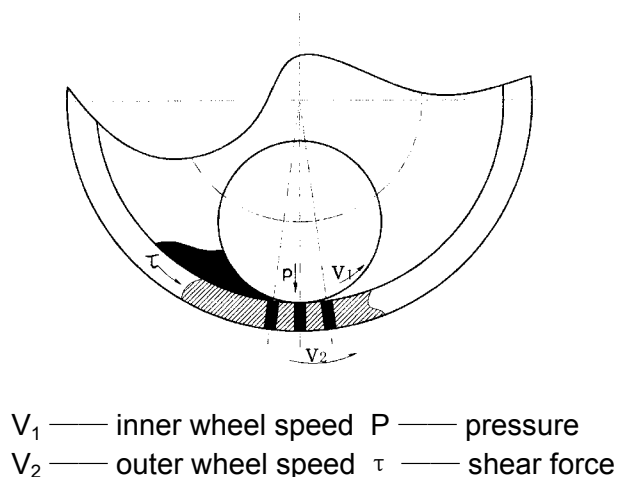


Figure 2. Schematic Diagram of Briquetting Mechanism

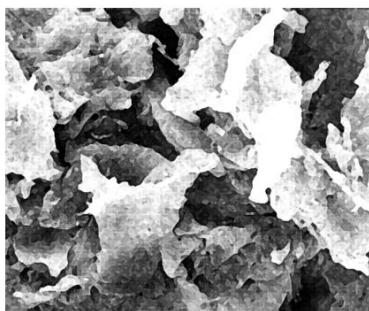

2000× Cross Section

- 1: Irregular layers formed after the process, layers embedded;
- 2: Spaces among layers are small as layer well folded;
- 3: Spaces among layers are well distributed.

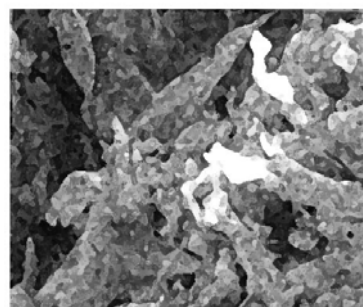


2000× Cross Section
 Pingya, Nanjing

- 1: fibres from raw materials are obvious;
- 2: big gap can be found among fibres;
- 3: gaps have irregular orientation.



6000× Cross Section

- 1: Fibre-like material disappeared, layers cross linked;
- 2: layers' contacts and connections are irregular;
- 3: intervals among layers are unified

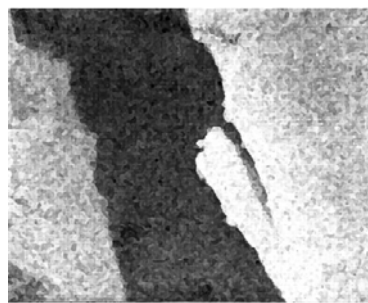

6000× Cross Section
 Pingya, Nanjing

- 1: Parallel fibre remains without cross link;
- 2: Big gap among fibres;
- 3: The glue-effect of lignin may be suggested.

Figure 3. Comparison of Processed and Original Biomass

3.2 Briquetting Process

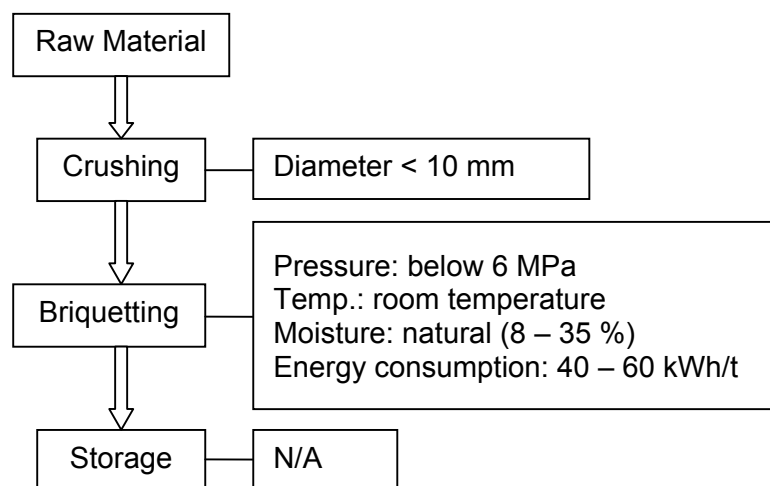


Figure 4. The New Biomass Briquetting Technique

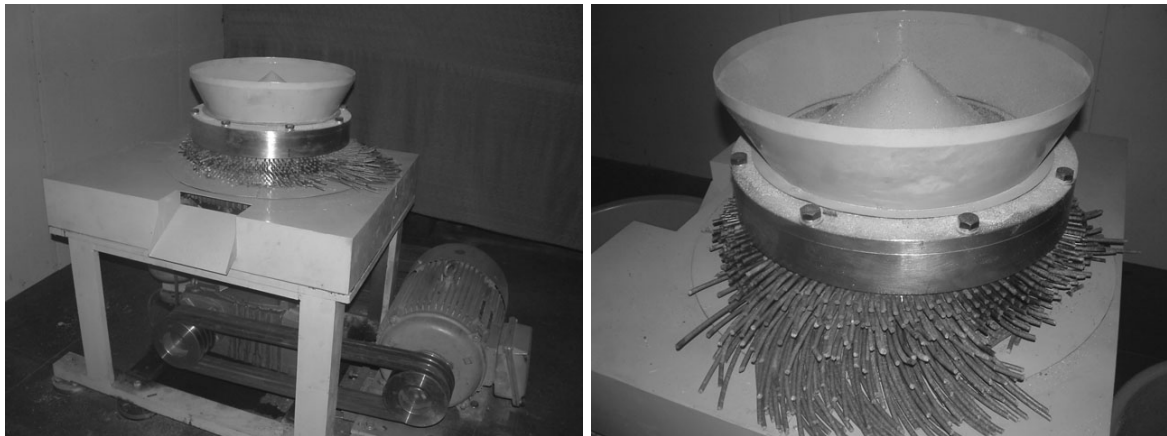


Figure 5 The Briquetting Device and Discharge Status



Figure 6 Raw Biomass Material and Briquettes

3.3 Major Parameters in Trial Test

Energy Consumption: 40 – 60 kWh/t

Density: ≥ 1.26

Moisture Contents: 8 – 35%

Particle Diameter: < 10 mm

Briquetting Pressure: < 6 MPa

3.4 Major Advantages of the New Briquetting Technique:

3.4.1 The electrical heating and temperature control are not required in the new briquetting system. The system complexity, the area requirement and energy consumption are greatly reduced.

3.4.2 The existing *Normal Pressure Briquetting* has been replaced by *Sheared Layer Embedding Briquetting*. The pressure required for the process is also reduced.

3.4.3 When briquetting under room temperature, there is no trouble caused by steam generated in the heat-up procedure. The technique is not sensitive to moisture content. The cost on drying and cooling systems can be saved.

3.4.4 Biomass is briquetted into pellet or stick shape under room temperature. There is no specific requirement on storage and transportation.

3.4.5 The whole system works under room temperature. The operation conditions, safety, reliability and maintenance are improved.

3.5 Current Status of Normal Temperature Briquetting Technique for Biomass with Original Moisture Content

3.5.1 The trial tests of normal temperature briquetting technique for biomass with original moisture content have been completed. The new briquetting mechanism has been verified.

3.5.2 The new briquetting process has been established via the trial tests:

Raw Material → Crushing → Natural Dry and Room Temperature Briquetting
→ Storage and Transportation

3.5.3 The prototype system revealing the new briquetting mechanism and technique has been developed.

3.5.4 18 patents have been declared nationally

3.5.5 2 patents have been declared internationally (PCT)

4 Conclusions

With the successful development of the new briquetting technique for raw biomass under room temperature, the space requirement, energy consumption, and running cost of biomass briquetting have been reduced significantly. With optimized system operation, small volume and low energy cost, this technique will make practical mobile biomass collecting and processing units. This will turn biomass into a promising alternative energy source for coal in the near future.

LAMNET Project Coordination

WIP

Sylvensteinstr. 2

81369 Munich

Germany

Coordinator: **Dr. Rainer Janssen**

Phone: +49 89 720 12 743

Fax: +49 89 720 12 791

E-mail: rainer.janssen@wip-munich.de

Web: www.wip-munich.de

LAMNET Coordination Support Point South America

CENBIO – Centro Nacional de Referência em
Biomassa

Avenida Prof. Luciano Gualberto 1289

05508-900 São Paulo

Brazil

Contact: **Prof. Dr. José Roberto Moreira**

Phone: +55 115 531 1844

Fax: +55 115 535 3077

E-mail: Bun2@tsp.com.br

Web: www.cenbio.org.br

LAMNET Coordination Partner

ETA – Energia Trasporti Agricoltura

Piazza Savonarola, 10

50132 Florence

Italy

Contact: **Ms. Angela Grassi**

Phone: +39 055 500 2174

Fax: +39 055 573 425

E-mail: angela.grassi@etaflorence.it

Web: www.etaflorence.it

LAMNET Coordination Support Point Central America

Universidad Nacional Autónoma de México

Instituto de Ecología

AP 27-3 Xangari

58089 Morelia, Michoacán, México

Contact: **Dr. Omar Masera**

Phone: +52 55 5623 2709

Fax: +52 55 5623 2719

E-mail: omasera@oikos.unam.mx

Web: www.oikos.unam.mx

LAMNET Coordination Partner

EUBIA – European Biomass Industry Association

Rond Point Schuman, 6

1040 Brussels

Belgium

Contact: **Dr. Giuliano Grassi**

Phone: +32 2 28 28 420

Fax: +32 2 28 28 424

E-mail: eubia@eubia.org

Web: www.eubia.org

Steering Committee

Contact: **Dr. Peter Helm**

E-mail: peter.helm@wip-munich.de



This Thematic Network is funded by the European Commission, DG Research,
(Project No. ICA4-CT-2001-10106).